



ZKDE502

Pair of 5MP Passive Transceivers /
BNC and power connector / 12-15
V DC



Maximum output: 1.1Vp-p


- Accident rate: > 2dB
- Interference: > 40dB
- BNC resistance: 75ohm
- UTP resistance: 100ohm
- It is a single channel passive video balun/transceiver.
- Allows real-time, high-performance color or monochrome (B/W) CCTV video transmission over UTP cable.

It supports HD-CVI/TVI/AHD and CVBS signals.

- Being small enough, it can be equipped directly to the camera. - Can be used as a transmitter or receiver.
- Built-in transient suppression protection.
- 1 channel transmission signal

Transmission distance *AHD (720P / 960H): 200m (Max) *CVI (720P): 300 m (Max) .CVI (1080P): 200 m (Max) *TVI (720P): 300 m (Max), TVI (1080P): 200m (Max)

Application and use

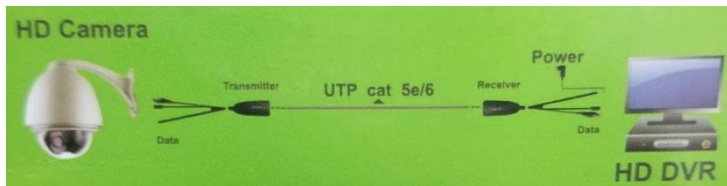

Package information

ZKCF800 1-Channel HDCVI Passive Balun * 1 Pair