

DHI-ARA11

Indoor Siren



- Sound alarms triggered by high sound pressure.
- Indoor rotating alarm light.
- Made from environmentally-friendly plastics.

System Overview

When receiving alarm signals, the device can trigger sound and light alarms.

Scene

Ideal for use indoors.

Technical Specification

Function

Indicator Light	Red indicator
Buzzer	1

Technical

Operating Current	≤300 mA (12 VDC)
Continuous Operating Time	≥45 min, 12 VDC
Sound and Light Alarm	Yes
Sound Pressure	105 dB ± 3 dB/30 cm (11.81")

General


Power Supply	10–15 VDC
Power Consumption	4.5 W (Max.)

Operating Temperature	–10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	≤90% (RH)
Product Dimensions	73.0 mm × 43.0 mm × 124.6 mm (2.87" × 1.69" × 4.91") (L × W × H)
Net Weight	126 g (0.28 lb)
Gross Weight	140 g (0.31 lb)
Installation	Surface mount
Casing Material	ABS and acrylic plate
Appearance Color	White ABS and red acrylic plate
Certifications	CE
Anti-corrosion Level	Basic Protection
Storage Temperature	–10 °C to +55 °C (+14 °F to +131 °F)
Storage Humidity	≤90% (RH)
Packaging Dimensions	82.0 mm × 50.0 mm × 133.0 mm (3.23" × 1.97" × 5.24") (L × W × H)

Ordering Information

Type	Model	Description
Siren	DHI-ARA11	Indoor Siren

Installation

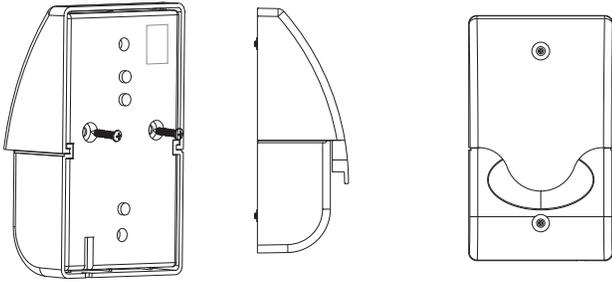

Dimensions (mm[inch])

