

Tech specs

LightSwitch (3-way) [120] Jeweller

Smart touch 3-way light switch



Device compatibility

Check

Components

Relay

Controls the power of a lighting appliance.

LightCore (3-way) [120] Jeweller



Touch-sensitive panels

SoloButton (1-gang) [120]

It is used when the switch is installed as a separate device. SoloButton consists of a front panel and a frame, coming as one component.



CenterButton (1-gang) [120]

It is used when the switch is installed between the device set.



SideButton (1-gang) [120]

It is used when the switch is installed on the right or left of the device set.




Frames

Frames for two, three, four, and five Ajax switches.


Frame (2 seats) [120]




Frame (3 seats) [120]



Frame (4 seats) [120]



Frame (5 seats) [120]



Configuration

Single switch

LightSwitch (3-way) [120] Jeweller is installed as a separate device.



Combined switch

LightSwitch (3-way) [120] Jeweller is combined as a set with other Ajax smart switches and installed into Frame side by side.



Touch-sensitive panel colors

Black

RAL 9005



White

RAL 9003

Graphite

RAL 7024



Ivory

RAL 1013



Fog

RAL 7047



Oyster

RAL 9002



Grey

RAL 7004



Olive

RAL 7044



RAL colors match actual colors as much as possible. However, they may slightly differ, so please only use them as a guide to the color choice.

Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

[Learn more](#) >

Frequency bands

905.0–926.5 MHz

Maximum effective radiated power (ERP)

up to 20 mW

Radio signal modulation

GFSK

Radio communication range

up to 1,100 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

[Learn more >](#)

Wings communication technology

Proprietary wireless communication technology to update the firmware.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Data packages reload in case of transmission errors.
- Data packages delivery check.

[Learn more >](#)

Frequency bands

905.0–926.5 MHz

Radio communication range

up to 1,100 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Key features

Automation scenarios

- By arming/disarming
- By schedule
- By alarm
- By temperature, humidity, or CO₂ concentration*
- By touching another LightSwitch / by pressing Button

Learn more >

* Scenarios by humidity and CO₂ concentrations are available when LifeQuality Jeweller is added to the system.

Operation without a neutral wire

LightSwitch (3-way) [120] Jeweller only needs a line (hot) wire to operate.

Minimum load power

20 W

The value is calculated for LED light appliances.

Contactless touch-sensitive panel

LightSwitch (3-way) [120] Jeweller is activated when a hand gets as close as 15 mm from the panel.

Night backlight

Optional, can be turned off in the device settings in the Ajax app.

Protection against incompatible appliances

Triggers if lighting appliances have insufficient power (up to 20 W). If protection is triggered, LightSwitch (3-way) [120] Jeweller turns off the load and sends a notification to Ajax apps. For low-power lighting appliances, the kit includes a capacitor.

Recommendations

The device is designed for indoor use only. A professional electrician should

It is recommended to install a bundled capacitor to ensure stable operation of

install the device.

LightSwitch (3-way) [120] Jeweller and
lighting appliance.

Sabotage protection

Protection against spoofing

device authentication

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

[Learn more](#) >

Power supply

Power supply voltage

120 V~, 60 Hz

The device does not need a neutral wire to operate.

Average consumption

up to 200 mW

Maximum power

600 W

For LightCore (3-way) [120] Jeweller.

Maximum load current

5 A

Overcurrent protection

more than 5 A

If protection is triggered, LightSwitch (3-way) [120] Jeweller turns off the load and sends a notification to Ajax apps.

Temperature protection

more than +60 °C

If protection is triggered, LightSwitch (3-way) [120] Jeweller turns off the load and sends a notification to Ajax apps.

Operating parameters

Operating temperature range

from –10 °C to +40 °C

Operating humidity

Up to 75% with no condensation

Protection class

IP20

Form factor of the switch

NA form factor (120)




Dimensions

Relay

LightCore (3-way) [120] Jeweller — 98.4 × 41.9 × 33.4 mm




Touch-sensitive panels

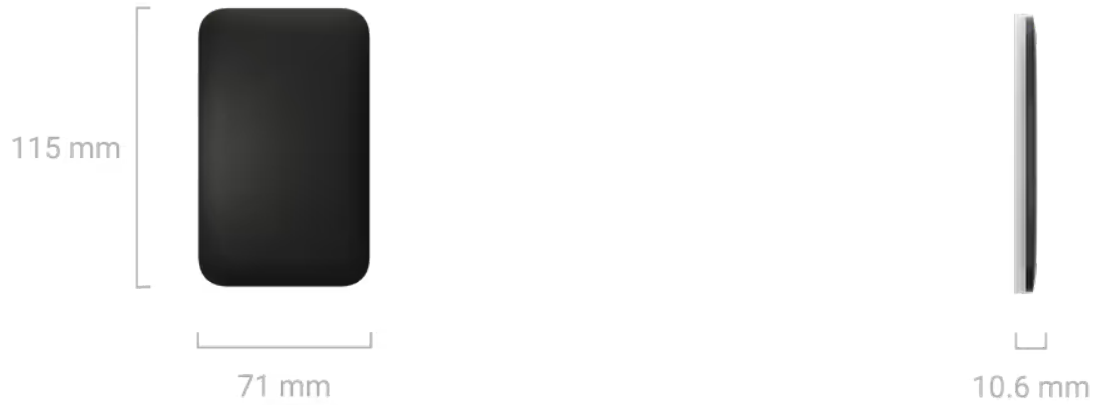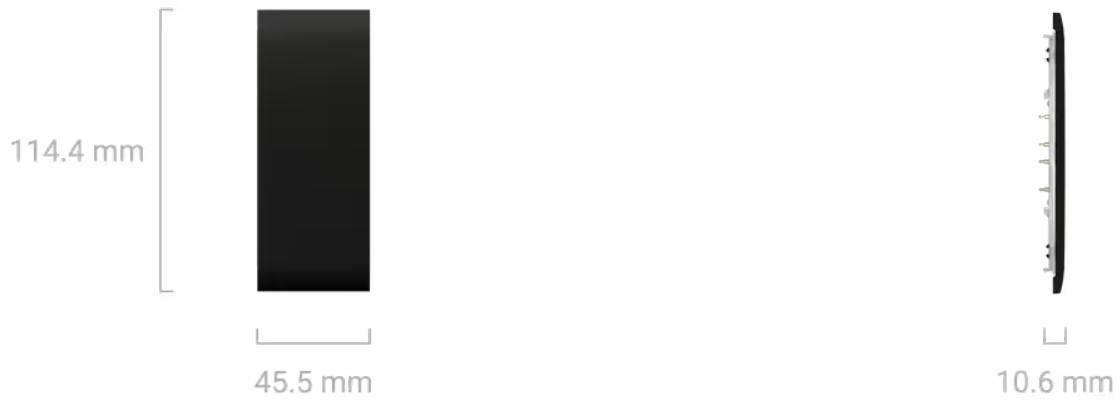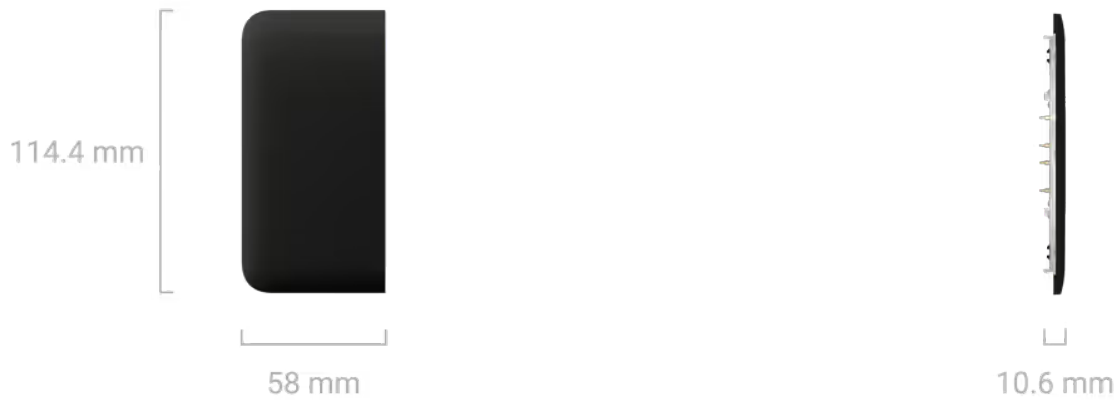
SoloButton (1-gang) [120] – 115 × 71 × 10.6 mm**CenterButton (1-gang) [120] – 114.4 × 45.5 × 10.6 mm****SideButton (1-gang) [120] – 114.4 × 58 × 10.6 mm**

Frames


Frame (2 seats) [120] – 115 × 117 × 6 mm




Frame (3 seats) [120] – 115 × 163 × 6 mm

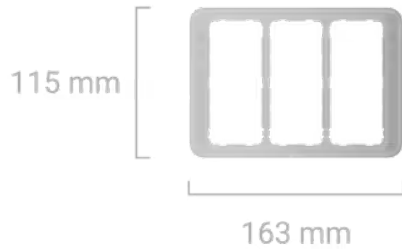

Frame (4 seats) [120] – 115 × 209 × 6 mm

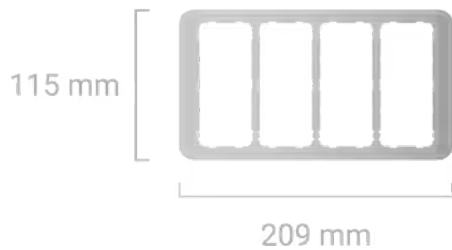

Frame (5 seats) [120] – 115 × 255 × 6 mm

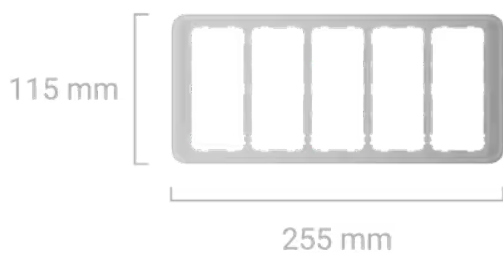

Weight

Relay

LightCore (3-way) [120] Jeweller — 69 g

Touch-sensitive panels

SoloButton (1-gang) [120] — 55 g

CenterButton (1-gang) [120] — 31 g

SideButton (1-gang) [120] — 34 g

Frames

Frame (2 seats) [120] — 22 g

Frame (3 seats) [120] — 28 g

Frame (4 seats) [120] — 35 g

Frame (5 seats) [120] — 41 g

Complete set

LightSwitch (3-way) [120] Jeweller is a prefabricated device, with each component available for separate purchase. Components are easily installed by attaching to each other.

Additional information

Compliance with standards

[Learn more](#) >

User manual

[Learn more](#) >

Warranty

24 months

[Learn more](#) >

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

✉ support@ajax.systems

🗣 [@AjaxSystemsSupport_Bot](#)



Rating 4.7

2,500,000

people worldwide under Ajax protection

Suggest a feature



Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Solutions

Customer stories

Solutions by facility type

Upgrades and retrofits

How it works

Software

For users

Ajax PRO: Tool for Engineers

PRO Desktop

Ajax Translator

Scenarios



Available on
App Store



Available on
Google Play

Support

Manuals and articles

Compliance with standards

Tools

Ajax device compatibility

Video storage calculator

Battery life calculator

Radio communication range calculator

Switches and outlets configurator

Fibra power supply calculator

All web tools

Company

For partners

- [Blog](#)
- [About us](#)
- [Press page](#)
- [Events](#)
- [Career](#)
- [Reviews and feedback](#)

- [For partners](#)
- [Ajax Academy](#)
- [Partner Portal](#)

 [México](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)
[End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved