

## Concealed-Terminal Adhesive Surface-Mount

Please visit the SECO-LARM website [www.seco-larm.com](http://www.seco-larm.com) for complete installation instructions.  
Please read the manual before you begin the installation.

### SM-433-TQ/W

1 1/4" (31mm) Gap, Closed Loop,  
Screw Terminals, White

### SM-433-TQ/B


1 1/4" (31mm) Gap, Closed Loop,  
Screw Terminals, Brown

### Features:

- Surface-mount magnetic contacts
- Adhesive mount
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- Cover hides mounting screws, terminal block, and wires
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 1 1/4" (31mm) Gap
- Double-sided tape included
- Lifetime limited warranty




SM-433-TQ/W shown



### Specifications:

Model	SM-433-TQ/W	SM-433-TQ/B
Loop type	Closed loop	
Electrical configuration	N.O. (SPST)	
Connectors	Gold-plated screw terminals	
Color	White	Brown
Mounting	Adhesive tape	
Material	Case	High-impact ABS plastic
	Contacts	Iridium-plated
Contact rating	1.0A@10VDC (max.)	
	10W (max.)	
Operating temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	2"x9/16"x1/2" (51x14x13 mm)	
Magnet dimensions	2"x9/16"x1/2" (51x14x13 mm)	
Magnet type	Rare-earth neodymium	

### Dimensions:

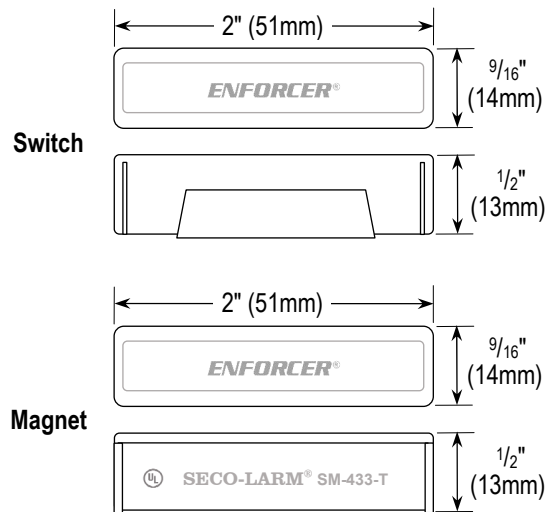

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)

## Montaje Superficial Adhesivo de Terminal Oculta

Por favor visite el sitio web de SECO-LARM [www.seco-larm.com](http://www.seco-larm.com) para obtener instrucciones de instalacion completas.  
Por favor lea el manual antes de usar el equipo.

### SM-433-TQ/W

1 1/4" (31 mm) Brecha, Circuito Cerrado,  
Terminales de Tornillo, Blanco

### SM-433-TQ/B

1 1/4" (31mm) Brecha, Circuito Cerrado,  
Terminales de Tornillo, Marrón

### Características:

- Contactos magnéticos de montaje en superficie
- Montaje adhesivo
- Terminales chapados en oro para una vida útil y confiabilidad más prolongadas
- Terminales de tornillo
- La cubierta oculta los tornillos de montaje, el bloque de terminales y los cables.
- Interruptor de un solo polo tiro doble, chapado en iridio para tener un alto punto de fusión y dureza Vickers para un mayor manejo de la potencia y una vida útil más larga
- Para circuitos cerrados.
- 1 1/4" (31mm) brecha
- Incluye cinta de doble faz
- Garantía limitada de por vida




SM-433-TQ/W mostrado



### Especificaciones:

Modelo	SM-433-TQ/W	SM-433-TQ/B
Tipo de Circuito	Circuito Cerrado	
Configuración eléctrica	N.O. (SPTD)	
Conectores	Terminales de tornillo dorados	
Color	Blanco	Marrón
Montaje	Cinta Adhesiva	
Material	Cubierta	Plástico ABS de alto impacto
	Contactos	Chapado en iridio
Puntuación de contactos	1.0A@10V C.C. (max.)	
	10W (max.)	
Temperatura de funcionamiento	-15°~160° F (-25°~70° C)	
Ciclos de cambio	50 Millones (0.1mA@5V C.C.)	
Dimensiones del interruptor	2"x9/16"x1/2" (51x14x13 mm)	
Dimensiones del imán	2"x9/16"x1/2" (51x14x13 mm)	
Tipo de imán	Imán Neodimio de tierra poco común	

### Dimensiones:

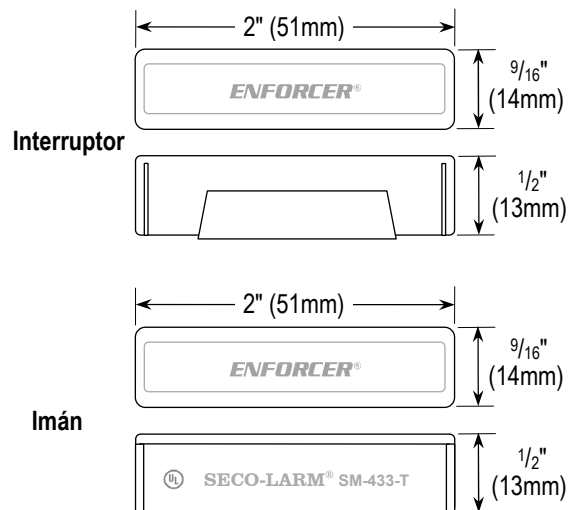

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)