ManualCallPoint Jeweller


Resettable wireless button with programmable scenarios



Versions:



ManualCallPoint (Green)
Jeweller



ManualCallPoint (Yellow)
Jeweller




ManualCallPoint (White)
Jeweller



ManualCallPoint (Blue)
Jeweller

7N Operating principle

In an emergency, ManualCallPoint Jeweller allows users to activate an alarm and run preprogrammed automation scenarios with a simple press. The button not only activates alarms and security sirens, but can also open electric locks, cut power to devices, and activate ventilation. Addressability ensures accurate tracking of button activations, specifying the time and room. Notifications are quickly sent to system users and the CMS. Designed for emergencies, ManualCallPoint Jeweller prioritizes reliability. The button can only be reset with a special tool (key) included in the kit.

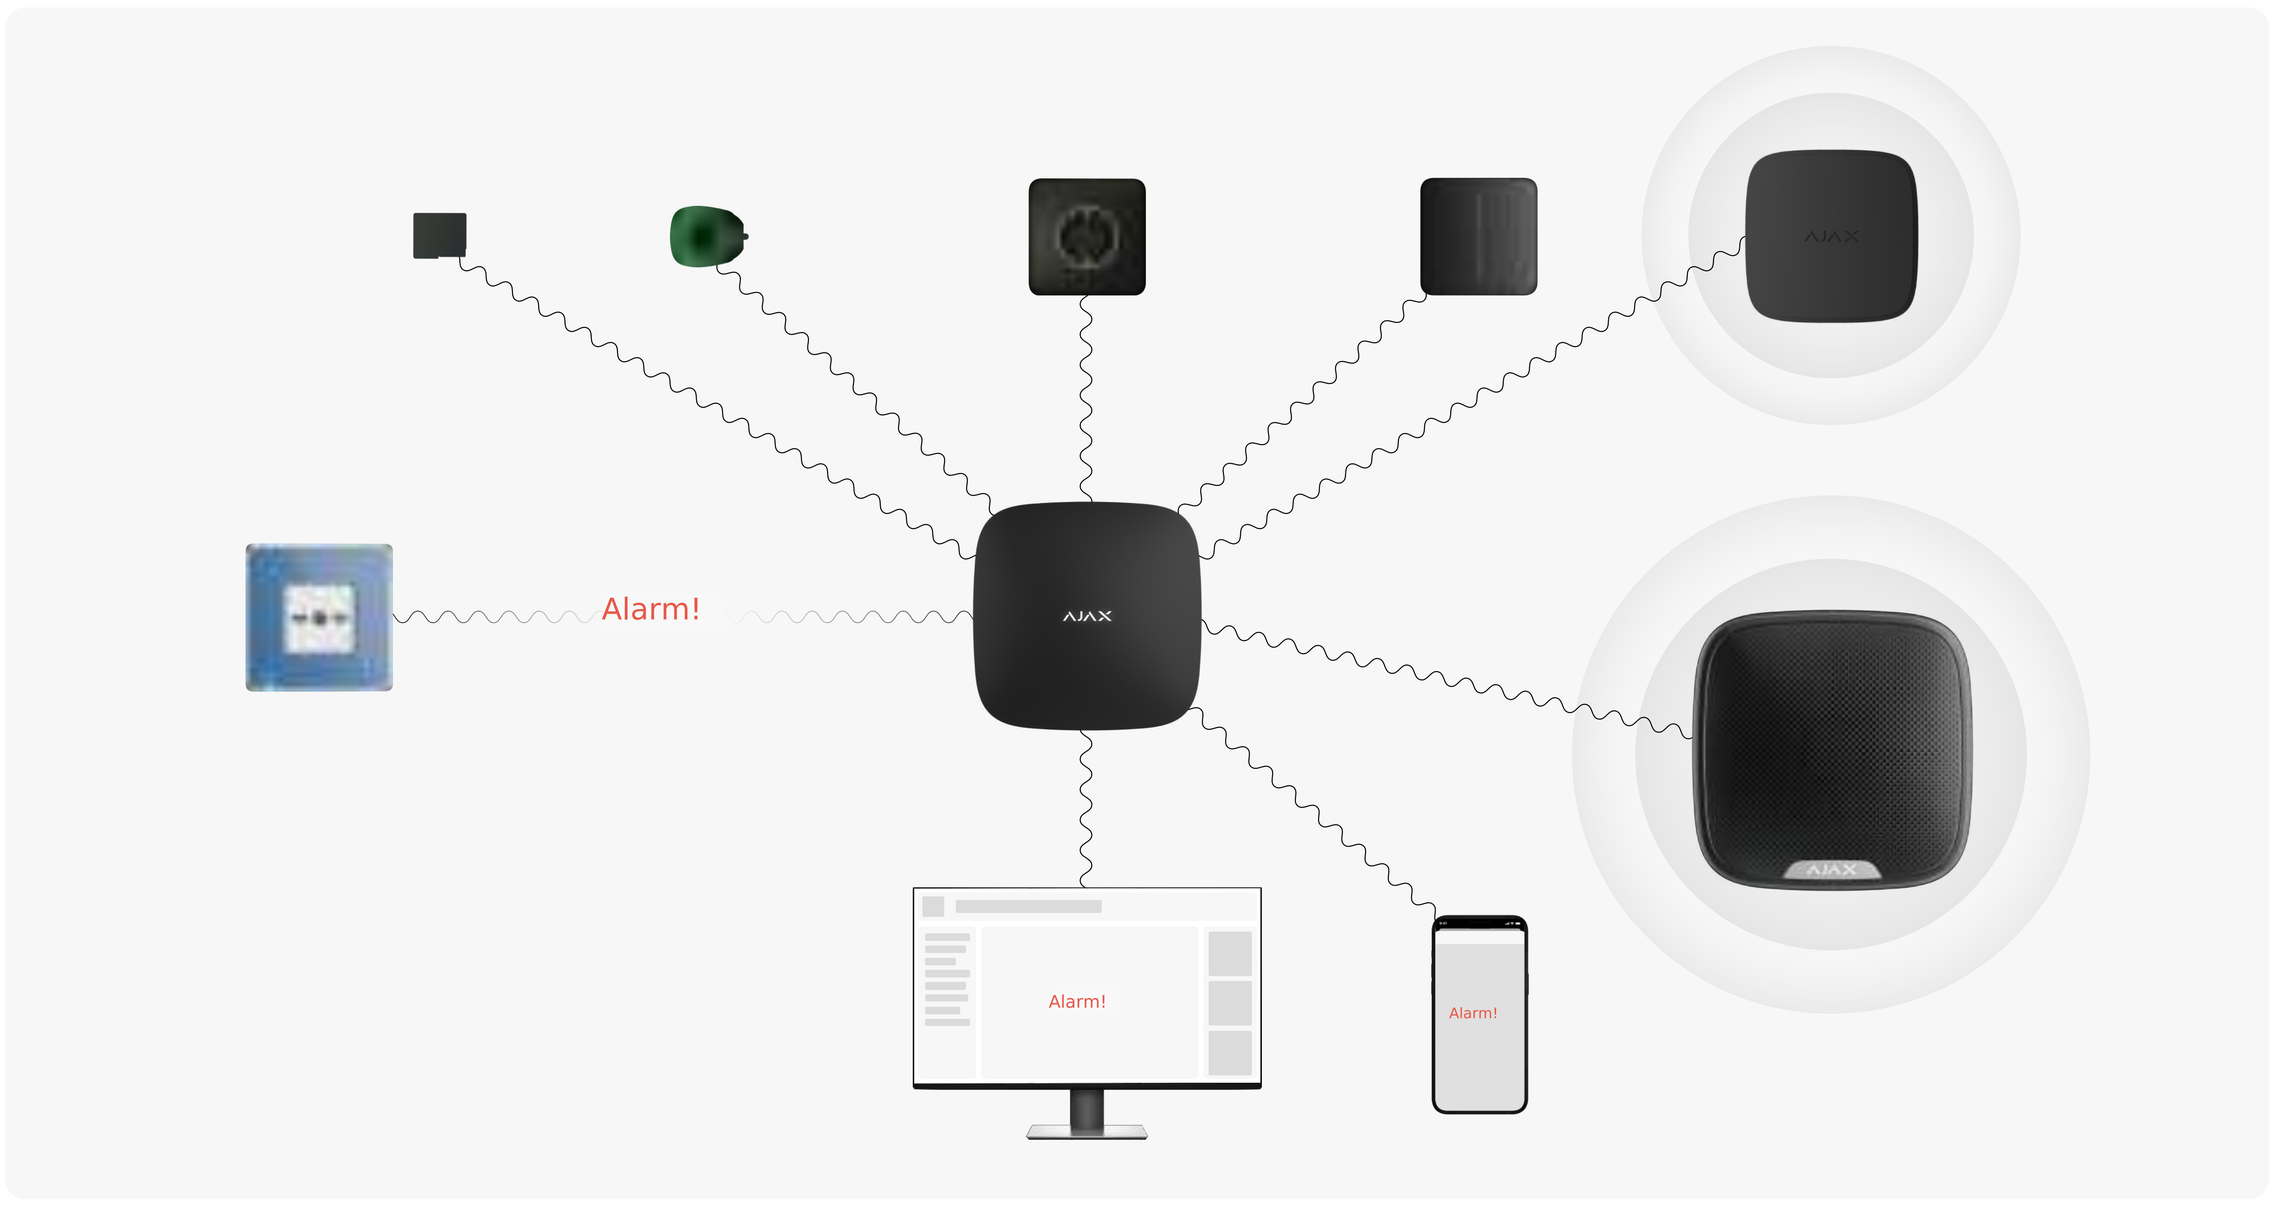

Flexibility as the main focus

. Alarm types: fire alarm, urgent assistance, panic button, gas leak alarm, malfunction alert, water leak alarm

- Configure programmable actions in the app
- Visual alarm verification using MotionCam detectors or any video camera connected to the Ajax NVR

- Alarm transmission to the monitoring center

Impeccable hardware

. Simplified button mechanism to reduce the risk of failures

- Up to 7 years of autonomous operation with pre-installed batteries
- Transparent protective cover to prevent accidental alarm activation
- Tamper switch

Smart and comprehensive ecosystem

. Instant critical alerts and maintenance notifications

- Regular device pinging to display current statuses in the apps

. Device self-test with a status report to the hub

- Up to 1.700 m (5.577 ft) of wireless communication and twice that with a repeater

mu Installation and configuration Quick che

. SmartBracket panel for mounting the device: no need to dismantle the housing

- Lock to secure the device in the SmartBracket
- Special tool (key) to reset the button after the alarm
- Pairing with a hub using the QR code

. Remote control and configuration in the app

In an Ajax system, you can combine devices from all product categories: Intrusion protection (both Superior and Baseline), Video surveillance, Safety and fire protection, or Comfort and automation. Create the system that best suits your needs and manage it in a single interface.

Compatibility with hubs, repeaters and	Communication with the hub	Power supply	Housing	Complete kit
For detailed information, scan the QR code or follow the link: ajax.systems/es/tools/devices-compatibility/?models=MCP.G.J%2CMCP.Y .J%2CMCP.W.J%2CMCP.B.J	Frequency bands 866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz 905.0-926.5 MHz 915.85—926.5 MHz 921.0-922.0 MHz Depends on the sales region Communication range up to 1.700 m up to 5.577 ft Without obstacles	2x CR123A batteries Pre-installed Battery life up to 7 years Installation Operating temperature range of operation from 0 *C to +50*C from 32 *F to 122 *F Operating humidity up to 80%	Color green, yellow, white, blue Depends on the version selected Dimensions 102 x 104 x 39 mm 4" x 4.1" x 1.54" Weight 214g 7.54 07	ManualCallPoint Jeweller Mounting panel SmartBracket 2 CR123A batteries (pre-installed) Special tool (key) Protective cover transparent Installation kit Quick guide

Para obtener información detallada, escanee el código QR o siga el enlace:

ajax.systems/support/devices/manualcallpoints-jeweller

1 support(Vajax.systems

4 (AjaxSystemsSupport_Bot

v ajax.systems