

User Manual

Color Door Camera DRC-4LN




www.commax.com

COMMAX Co.,Ltd.




- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

1. Part Names.

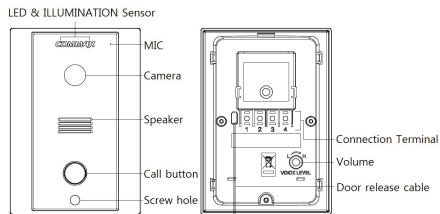



2. Package contents

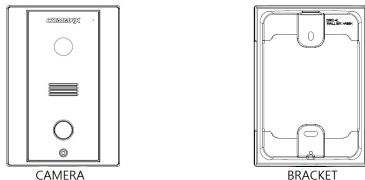

HOLE COVER SCREW PHM 3x20 SCREW GH1T 4x18 SHEET VOLUME


3. Wiring and Connection Instructions

※ Wiring #1, 2, 3, 4 on the back side of a door camera with a monitor as shown in the picture
(#1: VOICE, #2: GND, #3: DC12V, #4: VIDEO)

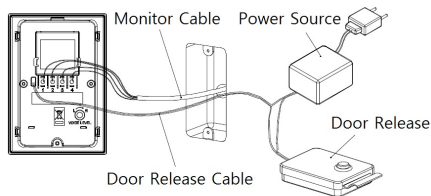



4. Installation

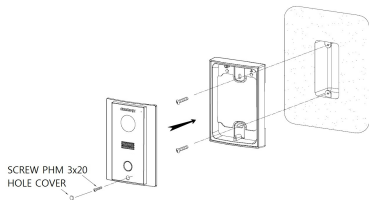

1. Fix a bracket on a wall with screws
2. Match and connect monitor line
3. Connect the Door Release Connection Line
4. Put a door camera unit into a wall bracket
5. Tighten a screw at the bottom side of a door camera.



5. Specification

Model No.	DRC-4LN				
Rated Voltage	12V $\overline{\text{---}}$ (Supplied from monitor)				
Wiring	4 wires(polarity)to a monitor				
	2 wires(non-polarity)to a electric door lock				
Video Transmission Standard	NTSC or PAL STANDARD.				
Sensor Type	C-MOS (COLOR) - CVBS				
Transmission	Simultaneous communication				
Minimum Illumination	0.1 Lux(within300mm)				
LED	Embedded LED(Night working)				
Effective Viewing Angle	68°(H), 50°(V)				
Angle Adjustment	Upward 13°				
Operating Temperature	-10°C ~ +40°C				
Dimension (mm)	99.8(W)×142.4(H)×35.2(D)				
Distance between a door camera and monitor	Diameter(pie)	Ø0.5	Ø0.65	Ø0.8	Ø1
	Distance(meter)	28m	50m	70m	115m



COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Int'l Business Dept. : Tel.; +82-31-7393-540~550 Fax.; +82-31-745-2133
Web site : www.commax.com

Edited.2021.05.10

Printed In Korea / 2021.05.105