

PDU Bar with 6 Individual Contacts

PDU06-15A

- 19" or vertical 1U standard PDU socket
- Lightning Protection and fused
- Plastic Housing , made from block burn PC
- Flexible and convenient installation





Specification

Items	Description
Model	PDU06-15A
Rated voltage	125VAC 50/60Hz
Rated current	15A
Rated load	2000W
Input voltage	110VAC 50/60Hz
Number of sockets	6
Cable length	1.8 meter
Socket type	USA type (NEMA5-15P)
Type of plug	VDE16A plug with UL
Color	Black


Items	Description
Material	ABS
Size	19" or vertical 1U
Method of application-mounting	Portable type
Type of connections	Welded-solder

Installation Method

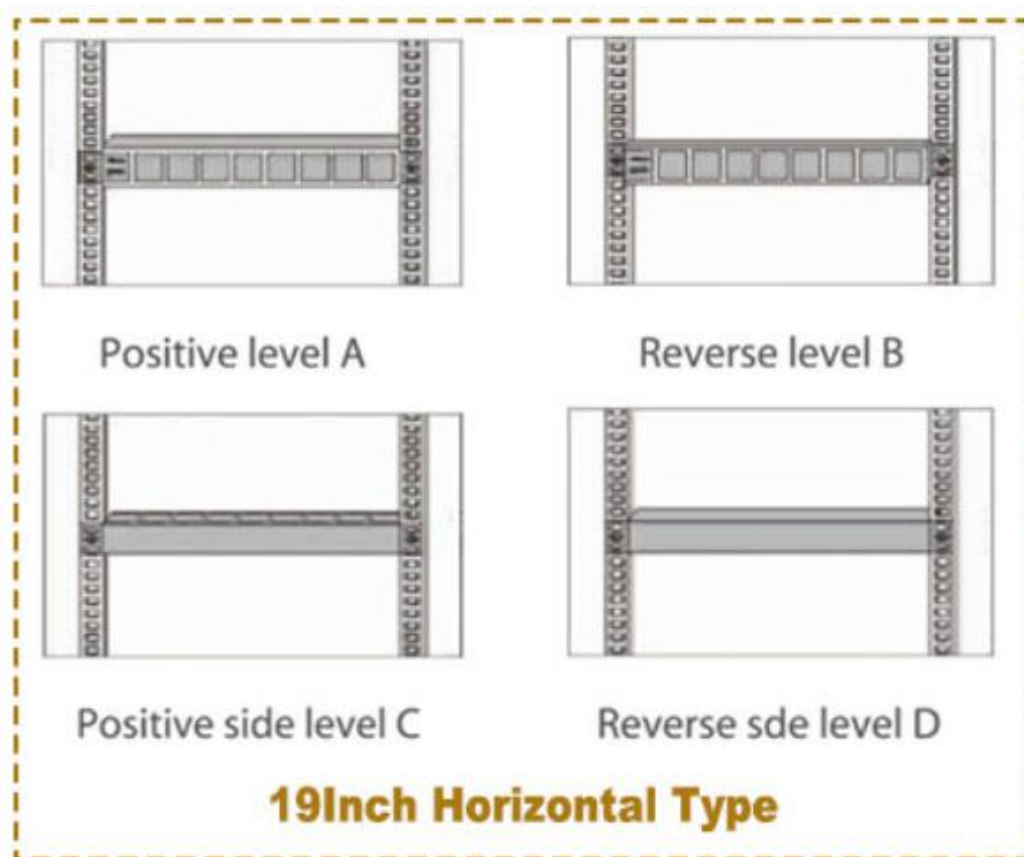


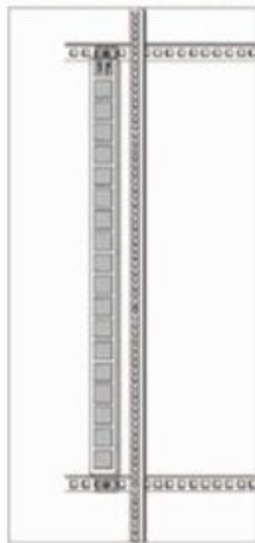

Positive level E

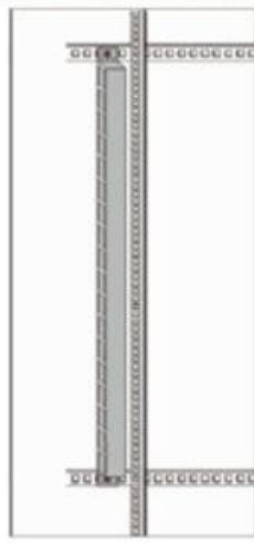

Positive side level F

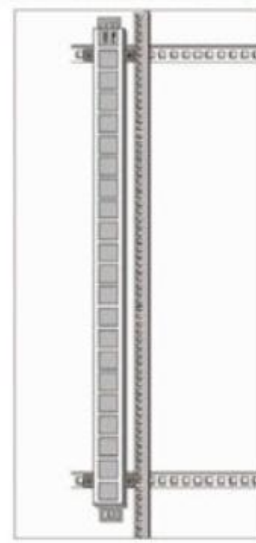

Reverse level G

Vertical Type