

Beam Reflection Photoelectric Sensors


E-936-S45RRGQ

Range: Up to 45ft (14m)



Characteristics:


- Range: 45ft (14m)
- Weather resistant IP66
- 6ft (1.8m) pre-wired cable
- Bracket and mounting hardware included for both sensor and reflector
- Adjustable detection range
- Compact size
- Monitoring method:
 - 10kΩ resistor
 - NC

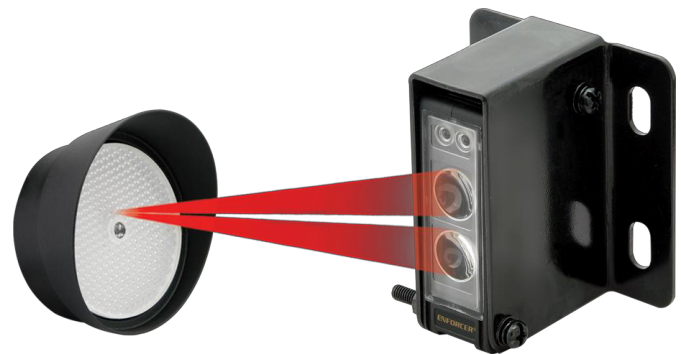

Specifications:

Type	Retro-reflective
Detection range	0.5 ~ 45ft (0.2 ~ 14m)
Supply voltage	12-30V DC / AC 60Hz, 100mA
Current	70mA @ 12V DC
Response time	10ms
Light source	IR LED
IR indicators	Yellow LED (alignment) Red LED (trigger)
Trigger output	SPDT relay output (NO / NC / COM)
Switching capacity	2A @ 30VAC / VDC
Enclosure	IP66
Operating temperature	- 40~ 131°F (-20~ 55°C)
Mounting brackets	Included

Dimensions:

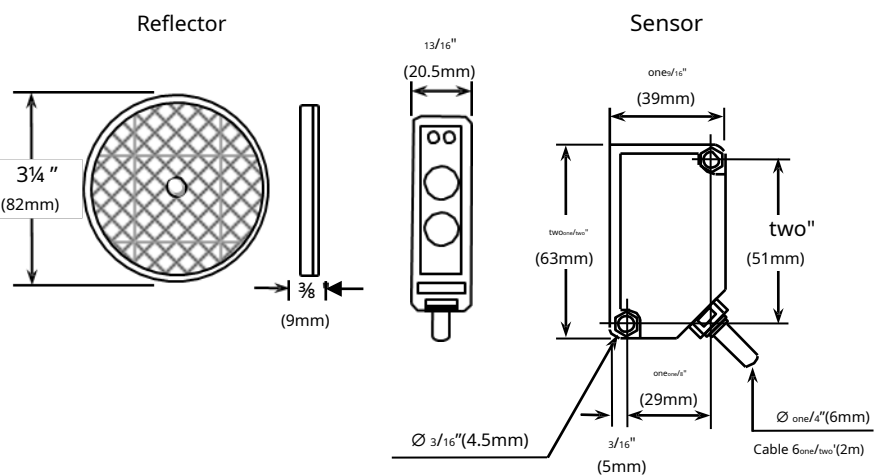

Optional gadgets:

E-931ACC-BLS6Q

Single Band Flush Mount Bracket




E-931ACC-BLS7Q

Wall bracket



E-931ACC-BLS8Q

Door frame bracket



SECO-LARM® USA, Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com E-mail: sales@seco-larm.com



Copyright © 2017 SECO-LARM USA, Inc. All rights reserved. All trademarks are owned by SECO-LARM USA, Inc. or their respective owners. SECO-LARM's policy is one of continuous development for this reason, SECO-LARM reserves the right to change prices and specifications without prior notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®