


SUA-XVR1E04-I

4CH Penta-brid 1080N/720P Cooper 1U 1HDD Digital Video Recorder



- 4-channel SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles.
- 4-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input. Supports up to 5-channel IP camera input and each channel can be up to 2 MP. The incoming bandwidth reaches 20 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- Smart H.265+ and H.265 dual-stream video compression.



Series Overview

This series offers simple and highly cost-effective HDCVI solutions. It provides 24/7 reliable monitoring with high-quality image performance, saving you on labor costs.

Functions

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Smart Dual Light

With Smart Dual Light technology, you can select Smart Illumination

Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual light technology can meet the requirements of a wide variety of scenes.

One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

AI Coding-ABR

Compared with H.265, AI coding-ABR can save 50% on storage costs, and save bit rate for complex scenes, which can prioritize image quality in dynamic scenes.

Technical Specification

System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

SMD

SMD Plus by Recorder	4 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD by Camera	5 channels

Audio and Video

Analog Camera Input	4 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	1. CVI: 1080p@25/30 fps; 720p@50/60 fps; 720p@25/30 fps. 2. TVI: 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 1080p@25/30 fps; 720p@25/30 fps.
IP Camera Input	Up to 5 channels of IPC access 1 IP channel by default + 4 channels (analog channels are converted to IP channels) Incoming bandwidth: 20 Mbps, recording bandwidth: 20 Mbps and outgoing bandwidth: 20 Mbps *After IP extension is enabled, the AI Function (SMD) will be disabled.
Encoding Capacity	Main stream: 1080N/720p/960H/D1/CIF@(1 fps–25/30 fps) Sub stream: CIF@(1 fps–15 fps)
Dual-stream	Yes
Video Bit Rate	32 kbps–4096 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA HDMI: 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/6
Third-party Camera Access	Panasonic; Sony; Hanwha; Axis; Arecont; ONVIF

Compression Standard

Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 24.06 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox

Recording Playback

Record Mode	General; alarm; motion detection
-------------	----------------------------------

Recording Playback	1/4
Backup Method	USB device and network
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback

Alarm

General Alarm	Motion detection; HDCVI alarm; camera external alarm; network alarm; PIR alarm
Anomaly Alarm	Error (no disk, disk error, low space, low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline
Intelligent Alarm	SMD Plus
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; audio; buzzer; log; preset; email

Ports

Audio Input	1-channel RCA 4-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
BNC	4-channel BNC Shares the same audio input with the first channel
Disk Interface	1 SATA port, up to 6 TB. This limit varies depending on the environment temperature.
USB	2 (2 rear USB 2.0 ports)
HDMI	1
VGA	1
Network Port	1 (10/100 Mbps Ethernet port, RJ-45)

General

Power Supply	12 VDC, 1.5 A
Power Consumption	<7 W (without HDD)
Net Weight	0.54 kg (1.19 lb)
Gross Weight	0.94 kg (2.07 lb)
Product Dimensions	197.0 mm × 204.3 mm × 41.5 mm (7.76" × 8.04" × 1.63") (W × D × H)
Packaging Dimensions	332.0 mm × 64.0 mm × 240.0 mm (13.07" × 2.52" × 9.45") (W × D × H)
Operating Temperature	–10 °C to +45 °C (+14 °F to +113 °F)
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Installation	Desktop
Certifications	CE-LVD: IEC 62368-1:2014 CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014

Ordering Information


Type	Model	Description
DIGITAL VIDEO RECORDER	SUA-XVR1E04-I	4CH Penta-brid 1080N/720P Cooper 1U 1HDD WizSense Digital Video Recorder
Accessories (Optional)	DHI-SSD-V800S1TB	SSD
	DH-NC650	802.11AC 650M WIRELESS ADAPTER
	DHI-SSD-V800S256G	SSD
	DHI-SSD-V800S512G	SSD
	DH-NC300	802.11AX 300M WIRELESS ADAPTER

Accessories


Optional:



Dimensions (mm[inch])

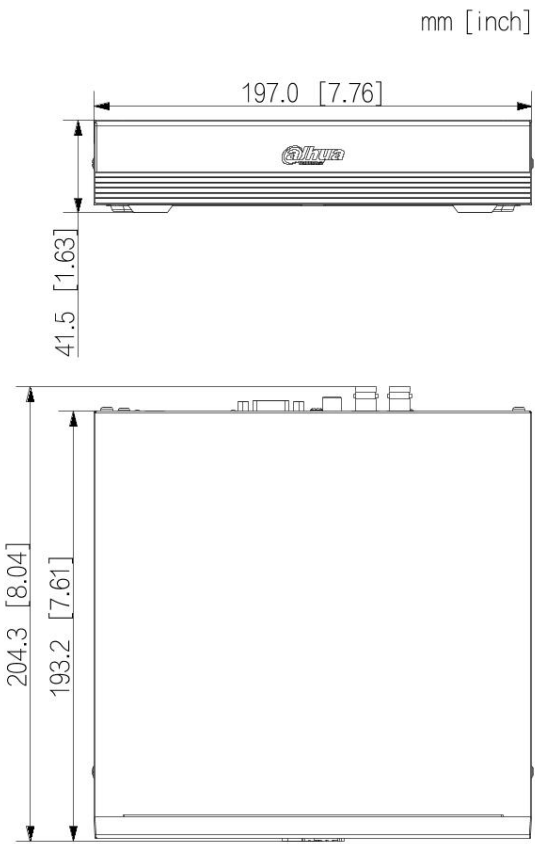

Panels

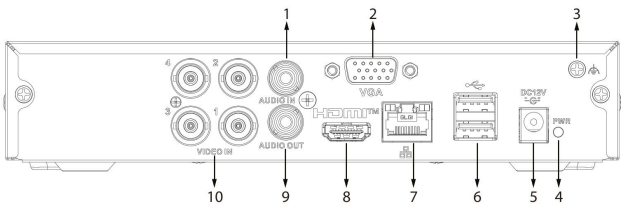

- | | |
|----------------------------|-------------------|
| 1 AUDIO IN, RCA Connector | 2 VGA Port |
| 3 Ground | 4 Indicator Light |
| 5 Power Input | 6 USB Ports |
| 7 Network Port | 8 HDMI Port |
| 9 AUDIO OUT, RCA Connector | 10 VIDEO IN |